## Boat Trim 6

For best boat and motor performance, the boat should be driven as nearly parallel to the water as possible. Driver and equipment should be so distributed in the boat that it is evenly balanced both front to rear and side to side.



Incorrect
OVERLOAD FORWARD
CAUSES BOAT
TO "PLOW"




Incorrect
OVERLOAD AFT
CAUSES BOAT
TO "SQUAT"




Correct
BALANCED LOAD
GIVES MAXIMUM
PERFORMANCE



Safety Warning: If engine is tilted forward so as to cause plowing (see A), swamping may occur in rough water. If engine is tilted aft so as to cause porpoising (see B), steering may be erratic or unstable. See correct angle adjustment (see C).

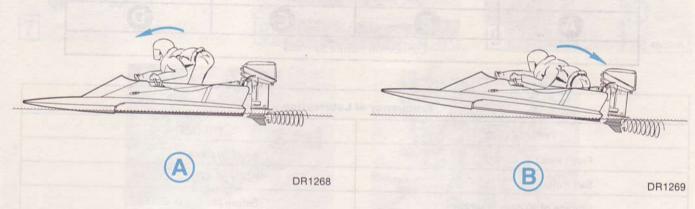





DR1271